



操作台系列 Operation console series

HPXM斜面操作台

HPXM beveled operation console



材料 Material	冷轧钢板 Cold rolled steel sheet
表面处理 Surface treatment	台体磷化底涂处理，外部为粉末涂层，颜色可分RAL7032和RAL7035两种织纹，安装板则为镀锌 Cabinet is applied with etch primer and covered with powder coating on the outer side. Two color textures, RAL7032 and RAL7035, are available. The mounting plate is galvanized.
防护等级 Protection grade	IP54(按GB4205-1993) IP54 (in accordance with GB4205-1993)
标准配置 Standard configuration	前单(双)门、操作台面、柜体、安装板、门锁、密封条、液压支撑 Front single (dual) door, operating console board, cabinet body, mounting plate, door lock, sealing strips and hydraulic support
钢板厚度 Thickness of steel sheet	箱体: 1.5mm 门板: 2.0mm 操作台面: 2.0mm 安装板: 2.5mm Cabinet body: 1.5mm Door plate: 2.0mm Operation console board: 2.0mm Mounting plate: 2.5mm



液压支撑
Hydraulic support



安装板
Mounting plate



PU发泡密封条/三段式
进线板
PU foaming sealing strip/three-section cable entry plate

产品特点 Features of products

- 人性化的结构设计美观大方
- 操作台面可向上掀起并配以豪华液压支撑固定，体现台体高端品质及人性化
- 前单(双)门离地很高，约为25mm，确保开门顺畅和便利
- 暗铰链，不会突出在门框内和柜中，易于安装，脱卸门板也便捷
- PU发泡技术确保台体的密封性
- The Humanized structure design is beauty and generous.
- The operation table can be upwards equipped with the luxury hydraulic to support fixed, which shows the high-end quality and humanized concept of the product.
- The front single (double) door is high from the ground, about 25 mm, ensures open the door smoothly and conveniently.
- The Dark hinge, inside the door and cabinet, easy to install, remove the door plate can be also convenient.
- PU foam sealing technology ensures the airtightness of the cabinet.

HPXM系列订货规格表

HPXM series order specification table

*可定制非标产品
Nonstandard products can be customization

序号	订货号 (HPXM) (7032)	订货号 (HPXM) (7035)	宽 Width	高 Height	深 Depth
1	HPXM6096402032	HPXM6096402035	600	960	400/480
2	HPXM8096402032	HPXM8096402035	800	960	400/480
3	HPXM1096402032	HPXM1096402035	1000	960	400/480
4	HPXM1296402032	HPXM1296402035	1200	960	400/480


HPXM系列尺寸规格表

HPXM series dimension table

规格尺寸/Dimension			高度/Height				安装板/Mounting plate	
宽 Width	高 Height	深 Depth	B1	B2	B3	B4	F1	F2
600	960	400/480	600	597	430	484	530	475
800	960	400/480	800	797	630	684	730	675
1000	960	400/480	1000	997	830	884	930	875
1200	960	400/480	1200	1197	1030	1084	1130	1075

HPXM系列细节图

HPXM series detail drawing

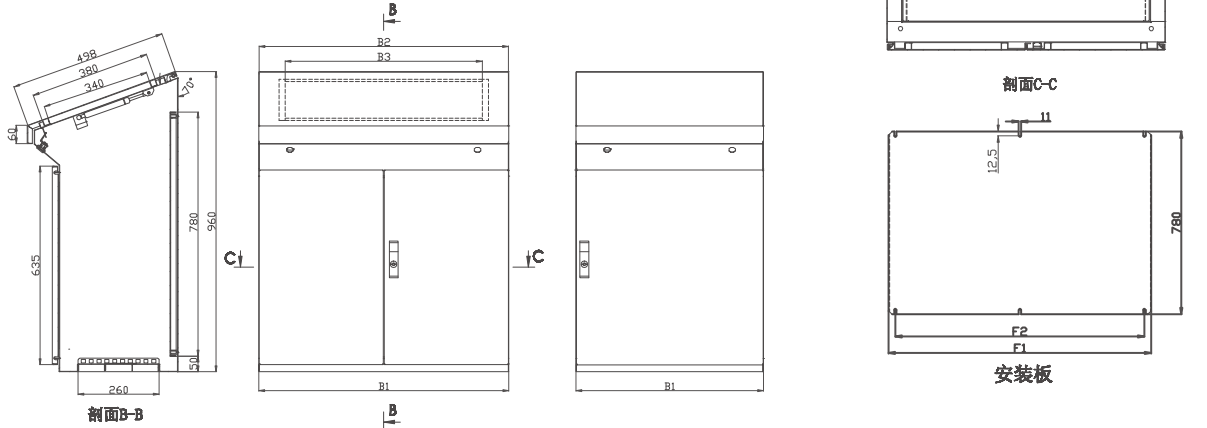

B1: 总宽度
B2: 门和台盖的宽度
B3: 控制台上台面左右侧加强筋内档净宽度
B4: 控制台下部框架内的净宽度

B1: Total width
B2: Width of the door and console cover
B3: Net width between the left and right reinforcing rib of upper surface for console
B4: Net width in the frame on the bottom of console

* HPXM斜面板液压支撑杆选用标准宽度<800;1500N.左右各1件.
800≤宽度<1200;200N.左右各1件.
宽度≥1200;300N.左右各1件.
* 宽度≤800时为2只铰链.

* HPXM skew plate skewback hydraulic support bar optional standard
width < 800, 1500N, per piece in the left and right
800 ≤ width < 1200; 200N per piece in the left and right
width ≥ 1200, 300N, per piece in the left and right
* 800 ≤ width, for two hinges

HPSD三段式操作台

HPSD three-section operation console



材料 Material	冷轧钢板 Cold rolled steel sheet
表面处理 Surface treatment	台体磷化底涂处理，外部为粉末涂层，颜色可分RAL7032和RAL7035两种织纹，安装板则为镀锌 Cabinet is applied with etch primer and covered with powder coating on the outer side. Two color textures, RAL7032 and RAL7035, are available. The mounting plate is galvanized.
防护等级 Protection grade	IP54(按GB4205-1993) IP54 (in accordance with GB4205-1993)
标准配置 Standard configuration	前单(双)门、操作台面、柜体、安装板、门锁、密封条、液压支撑 Front single (dual) door, operating console board, cabinet body, mounting plate, door lock, sealing strips and hydraulic support
钢板厚度 Thickness of steel sheet	箱体: 1.5mm 门板: 2.0mm 操作台面: 2.0mm 安装板: 2.5mm Cabinet body: 1.5mm Door plate: 2.0mm Operation console board: 2.0mm Mounting plate: 2.5mm



水平台面液压支撑
Hydraulic support for horizontal console surface



PU发泡密封条
PU foam sealing strip



后上门内部固定
The back upper door internal fixation



上台体安装板
the upper console mounting plate

产品特点 Features of products



- 独特的外形结构设计彰显台体的豪华品质
- 三段式台体均可拆卸并可独立使用
- A、B操作面板，后显示器盖板，前后单(双)门均可打开并配以豪华液压支撑以及高强度拉杆的使用体现了台体的人性化设计及安装的便利性
- 前后单(双)门离地很高约为25mm，确保开门的顺畅和便利
- 具体三段台体结构尺寸详见图纸
- Unique appearance and structure design embodies luxury character of console body.
- The three sections of console body are dismountable and can be used independently.
- A and B operating panels, back display cover plate and front and back single (dual) doors can be opened and fixed with luxury hydraulic supports and high-strength draw bars, embodying humanized design and installation convenience.
- Ground clearance of front and back single (dual) doors is sufficient, about 25mm, ensuring smoothness and convenience of door opening.
- Specific three-section console structural dimension is detailed in drawing.

HPSD系列订货规格表 HPSD series order specification table

*可定制非标产品
Nonstandard products are customizable

序号 No.	订货号 (HPSD) (7032)	订货号 (HPSD) (7035)	宽 Width	高 Height	深 Depth
1	HPSD6013502032	HPSD6013502035	600	1300	500
2	HPSD8013502032	HPSD8013502035	800	1300	500
3	HPSD1013502032	HPSD1013502035	1000	1300	500
4	HPSD1213502032	HPSD1213502035	1200	1300	500

HPSD系列细节图 HPSD series detail drawing

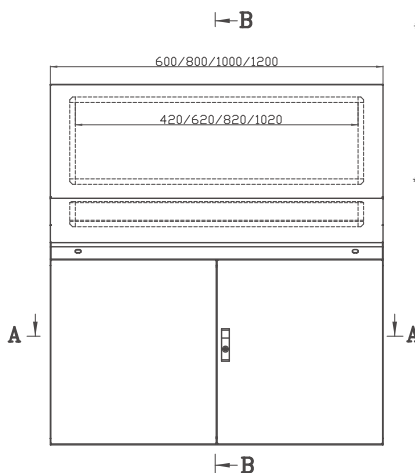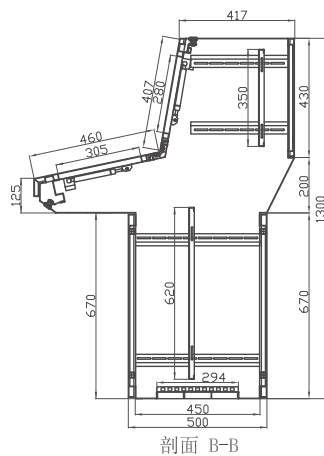

* HPSP立面板液压支撑杆选用标准
不限宽度,均为150N

HPSP台面板液压支撑杆选用标准
宽度 < 800; 150N 左右各1件。
800 ≤ 宽度 < 1200; 200N 左右各1件。
宽度 ≥ 1200; 300N 左右各1件。

* 宽度 ≤ 800 时为2只铰链。

* HPSP set panel skewback hydraulic support bar
optional standard
Unlimited width, all 150N

HPSP console surface plate skewback
800 ≤ width < 1200; 200N per piece in the left and right
800 ≤ width < 1200; 200N per piece in the left and right
width ≥ 1200, 300N, per piece in the left and right
* 800 ≤ width, for two hinges

